
WILS Lotus AHD/960H HYBRID 8-CH DVR

LDVR-A800H



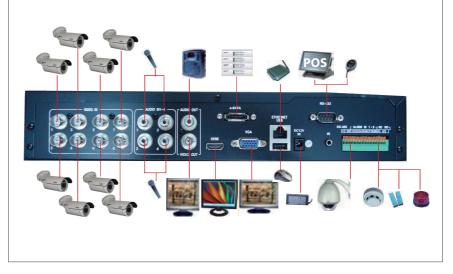

Model

Your Security Provider

Live Display Recording playback Split Screen Main monitor Call monitor Audio input / Audio Output Freeze Sequential switch Live Digital Zoom Watermark **Recording Mode** Pre-record Mode Post-record time Playback Search Loss detection Motion detection Buzzer Alarm Input / Output Alarm set/unset; Panic Push alarm notification I/R remote RS-232 / RS-485 3G Dongle support Storage HDD Partitions Backup Trigger Event log Multi-Langage System recovery Watch Dog Timer Network Web(GUI) E-mail FTP Video Audio

Audio Protocol Remote user Remote stations Password Security Dimension / Weight Power Consumption Temperature

Specification are subject to change without prior notice

LDVR-A800H

System Configuration

Realtime live display for 30/25fps each channel AHD: 720P 120/100fps, 960H: 240/200fps 1/4/7/9 CH HDMI, VGA, BNCx1 BNCx1 4 RCA-jack connection / 1 RCA-jack connection (up to 2 Vrms) Yes User adjustable x2, x4 Yes Manual / Schedule / Motion 0~10 sec 0~60 minutes Video loss, Event, Date/Time, Smart search Yes Support configurable detection area & senstivity Yes 8 / 1 (NC or NO) No Yes, to mobile phone Yes Yes / 2-PIN PTZ control Yes 2x SATA HDDs (support 4TB/HDD), HDD Extension for 1 eSATA connect Configurable "Motion partition size" and "Auto-overwrite" **USB 2.0** Video Loss, Motion, Alarm Yes Yes Auto power on after power loss recovery Yes RJ-45 10/100 baseT Ethernet connector Remote setup, monitoring backup, Remote software upgrade, I.E software for multiple DVRs (64ch Display on Screen) Configurable HTTP/Control/Data port Alarm notification to stationary or mobile devices Alarm video/audio file storage 1/4/5/10 split screen display & SEQ made for I.E; Electronics maps Two directional TCP/IP, HTTP, PPPoE, DHP, DDNS, FTP, TSP Up to login 8 User PC base, smart phone, or PDA Multi-level password(4 level, up to 18 accounts) protection 320(W) x 210(D) x 50(H)mm / 4 Kgs +12VDC 0°C ~ +40°C