

# HYBRID DVR

LHVR3211

## Features

- Full HD 1080P, 720P and 960H input live/recording resolution
- Support IP Camera (model no: LHVR1611, 16-channels Hybrid + 4 IP type)
- Possess higher compression rate and better image by adopting new video compression technique.
- Control DVR module and ID setting by Keyboard
- Motion function enables to schedule the recording
- Check the status of system operation and the records of online users
- Firmware upgrade by USB or remote control way




Centre Control & Monitoring Interface

Easy To Install

Lower Bandwidth

Instinct Operation

Friendly Interface

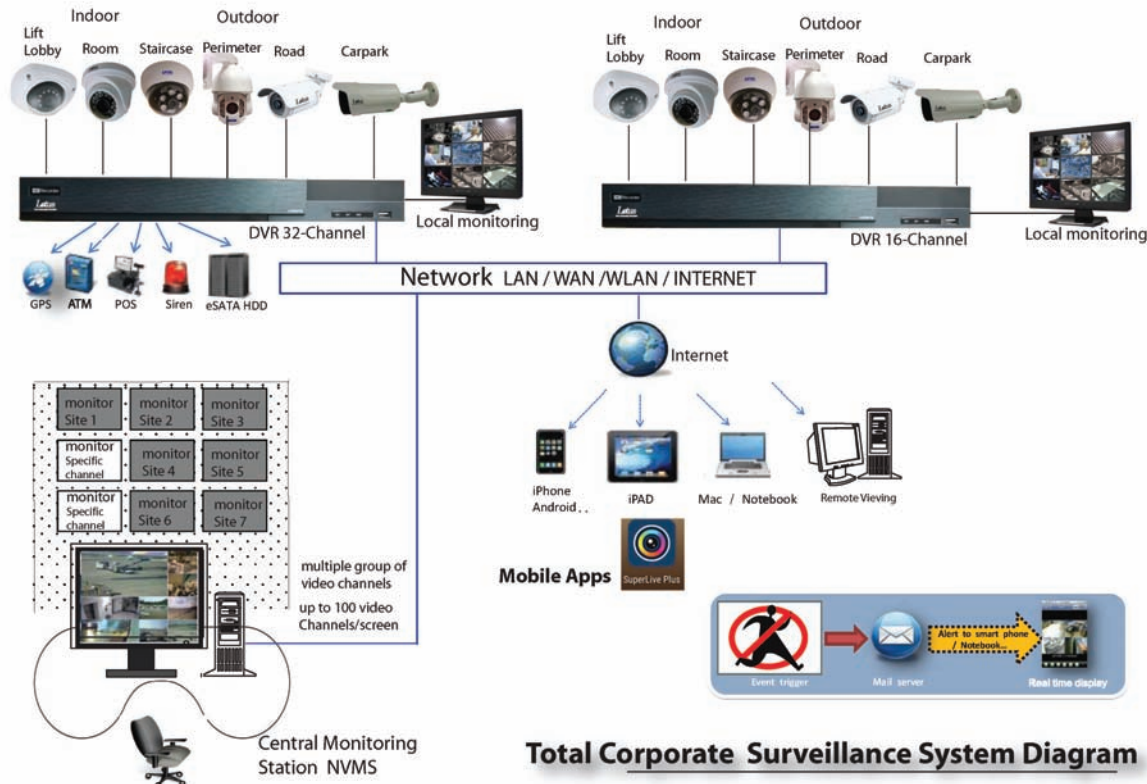

Total Corporate Surveillance System Diagram

Model		LHVR3211
Input	AHD/TVI/CVI	32CH
	Simultaneously Local Playback	16CH
Output	VGA	1920x1080 / 1280x1024
	HDMI	1920x1080 / 1280x1024
Display Channel	CVBS	MAIN / SPOT
		1 / 4 / 9 / 16 / 25 / 32
Compression Method		H.264 High Profile
Recording Resolution	AHD/TVI/CVI	1080P
		480FPS (NTSC) ; 384FPS (PAL)
		720P/1080Lite
		960FPS (NTSC) ; 800FPS (PAL)
		960H
		960FPS (NTSC) ; 800FPS (PAL)
Backup		USB 2.0 / Network remote backup
Storage		SATA x8 (each 8TB)
Alarm		Input : 16 ; Output : 4
Audio		Input : 16 ; Output : 1
PTZ Control		PELCO-P, PELCO-D, CoC(UTC)
Ethernet		10/100/1000 M Base-T
Network-Function		Support licensed CMS(100CH) / EMAP/ IE
Network Connection		TCP/IP, PPPoE, DHCP, DDNS(Auto DDNS)
Client Application		Display / Playback / Backup / DVR control / PTZ Control
Power Source		AC 110V / 230V
Operating Temperature		5°C ~ 40°C
Dimension		2U height, 430(W) x 90(H) x 450(D)mm

Specifications are subject to change without prior notice.

## Main features


- Multi PTZ protocol support
- Programmable 128 Preset points and 8 cruises
- Related trigger preset point control
- Authority account setu
- USB mouse control
- To use USB mouse to control on friendly GUI
- Playback search mode: by time or event
- Event log and search
- Support network function
- Multi connection type: STATIC (Fixed IP), DHCP, PPPOE
- Support DDNS NAT (P2P)
- Support event trigger to send Email
- Remote connection limitation
- Auto bandwidth adjustment by network status
- Support network remote control
- Remote record
- Remote playback
- Remote PTZ control
- Remote configuration
- Remote IE surveillance
- Remote CMS control
- Remote EMAP control
- Remote camera color adjustment
- Remote snapshot
- Supports COC ( control over coaxial) function



Front view



Rear panel

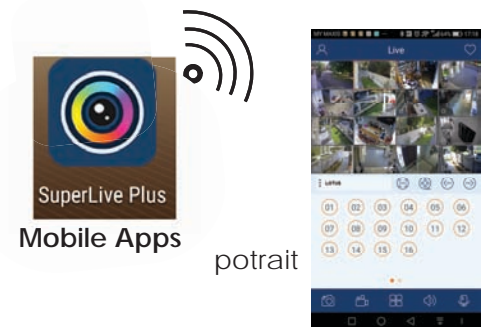

Mobile Apps

potrait

lanyard

